


Glory

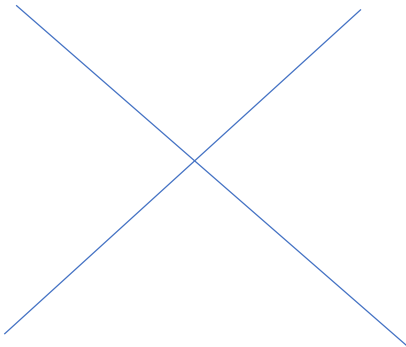

Profile Heat Sink	Dimensions	Mounting Clips	Watt [MAX]
			11.52 W/M

Specifications

Main Features

PARAMETERS	DESCRIPTION
LED PACKAGE	2016, 3/5 SDCM, LM80 PART
CRI	80-85 Ra, 90-95 Ra
CCT/COLOR	2700K/3000K/4000K/6500K*
DIFFUSER	Frosted [Sliding type, 0.3 mm]
END CAPS	Plastic
Mounting clips	S.S.
V in	24 v dc
DIMENSIONS	9.00 mm W X 11.60 mm H
CUTTABLE LENGTH	41.25 mm
DRIVER	Non-integrated

- 144 LED Per Meter
- Choose from 4.8 to 11.52 watts
- Powered by OSRAM
- Constant voltage
- Finishing: Silver Anodized
- 24 V DC
- IP Rating: IP-44
- MOQ: 10 M

* White 2700 K, 3000 K, 3500 K, 4000 K, 6500 K, 8000 K.

LM -80 APPROVED

30,000 WORK HOURS

1 BIN PROCESSING

Customization parameters:

❖ STANDARD SIZES :-	500 MM	1000 MM	2000 MM	CUSTOM SIZE
❖ STANDARD WATTAGES :-	4.8W / M	7.2W/M	9.6W/M	11.52W/M

PCB specifications:

- Material: FR4 - RIGID PCB, 1.6 mm thickness
- Width: 5 mm width Cuttable 41.25 mm
- V in: 24V dc
- LED: 2016, 144 LED/m, 6 LED series



Applications

Economy surface lighting, under cabinet, kitchen, furniture, small coves, mirrors etc.



Optional with 100 mm male / female self-locking connector