
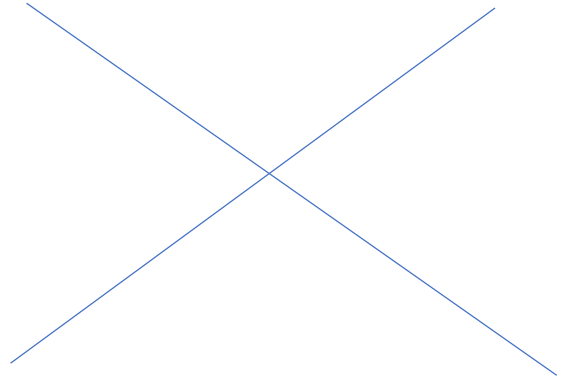
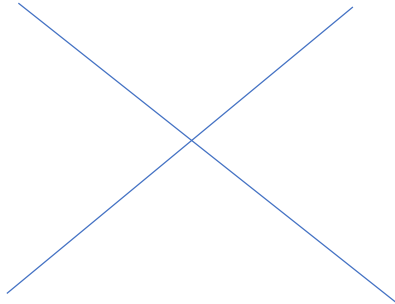



Neo



Profile Heat Sink	Dimensions	Mounting Clips	Watt [MAX]
			7.2 W/M

Specifications

Main Features

PARAMETERS	DESCRIPTION
LED PACKAGE	2835, 3/5 SDCM, LM80 PART
CRI	80-85 Ra, 90-95 Ra
CCT/COLOR	2300~8000*, R,G,B,A,P,C,Y,F,O**
DIFFUSER	Neon Tube
END CAPS	Silicone
Mounting clips	PVC / ALU Profile
V in	12 v dc
DIMENSIONS	13.40 mm W X 11.00 mm H
CUTTABLE LENGTH	21 mm
DRIVER	Non-integrated

- 144 LED Per Meter

- Choose from 4.8 to 7.2 watts

- Powered by BRIDGELUX

- Constant voltage

- Finishing: Silver Anodized

- 12 V DC

- IP Rating: IP-65

- MOQ: 5 M

* White: 2300 K, 2700 K, 3000 K, 3500 K, 4000 K, 5000 K, 5500 K, 6000 K, 6500 K, 8000 K.

** RGBAPSYFO: - Red, Green Blue, Amber, Pink, Sky-blue, Yellow, Flame, Orange

LM -80 APPROVED

30,000 WORK HOURS

1 BIN PROCESSING

Customization parameters:

❖ STANDARD SIZES: -	5 Meter
❖ STANDARD WATTAGES: -	7.2 W/M

PCB specifications:

- Material: Flexible PCB, 0.3 mm thickness
- Width: 5 mm width Cuttable 21 mm
- V in: 12V
- LED: 2835, 144 LED/m, 3 LED series



Applications

