

TUNE - Flexi 240



High density tunable flexible LED strip

24 VOLT DC | 9.6 W/M | 2700K CCT TO 6500K CCT | 19.2 W/M




Compatible with dimmable / Dali etc. standard tunable controllers and Wi-Fi controllers with remote



DGFS-2835-TUNE240-24V STRIP SPECIFICATIONS

- * LED Package 2825 High Efficiency LED Package
- * LED Lumen Efficacy 160 Lm Per Watt
- * Input Voltage 24v Dc
- * Wattage/meter 9.6 Watt / Mtr & 19.2watt/mtr
- * Number Of LED 240 Led/mtr (2700k-120 & 6500k-120)
- * Pcb Type Flexible Type
- * Pcb Size 5000mm X 12mm X 0.35mm
- * LED Pitch 8.33mm
- * Cuttable Size 49.5mm
- * Viewing Angle 120 Degree
- * Tape Thermal Conductive Tape Pre-installed
- * Cri 80 + Standard / 90 + On Demand
- * Packing 5000 Mm Standard Reel Packing

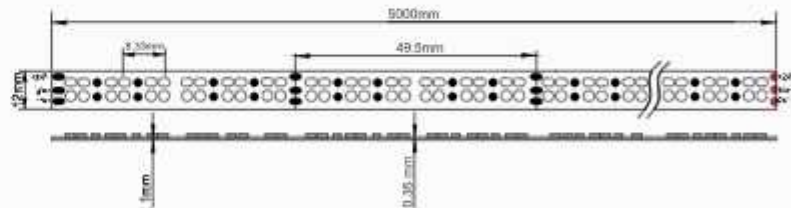

These tunable white BRIDGELUX LED strips are designed for long term professional human-centric lighting applications and are perfectly suited for linear lighting, cove lighting, curved applications. Each LED strip contains 120 warm and 120 cold white LEDs per meter and is available in 9.6 W and 19.2 W wattages.

Manufactured and Distributed by



+91 83800 10000 / +91 98202 36828 / + 91 98202 87187

Info@digiopto.com, projects@digiopto.com www.digiopto.com

Unit no 201, Anita Shanti Industrial Est, Bldg no 2, Dhumal Nagar, Waliv, Vasai (East), Dist. Palghar - Pin- 401208. INDIA.

Linear Lighting Solutions by
DigiLED

