

Ultra-line



Profile Heat Sink	Dimensions	Mounting Clips	Watt [MAX]
			28.8 W/M

Specifications

Main Features

PARAMETERS	DESCRIPTION
LED PACKAGE	2835, 3/5 SDCM, LM80 PART
CRI	80-85 Ra, 90-95 Ra
CCT/COLOR	2300~8000*, R,G,B,A,P,C,Y,F,O**
DIFFUSER	Opal (Press fit)
END CAPS	Plastic
Mounting clips	Hanging rope
V in	24 v dc
DIMENSIONS	54.00 mm W X 70.00 mm H
CUTTABLE LENGTH	31 mm
DRIVER	Non-integrated

- 192 LED Per Meter Customized
- Choose from 9.6 to 28.8 watts (Customized)
- Powered by BRIDGELUX
- Constant voltage
- Finishing: Silver Anodized
- 24 V DC
- IP Rating: IP-44
- MOQ: 10 M

* White: 2300 K, 2700 K, 3000 K, 3500 K, 4000 K, 5000 K, 5500 K, 6000 K, 6500 K, 8000 K.

** RGBAPSYFO: - Red, Green Blue, Amber, Pink, Sky-blue, Yellow, Flame, Orange

LM -80 APPROVED

30,000 WORK HOURS


1 BIN PROCESSING

Customization parameters:

STANDARD SIZES :-	600 MM	1200 MM	1800 MM	2400 MM	CUSTOM SIZES
STANDARD WATTAGES :-	18 W	36 W	54 W	72 W	AS PER

PCB specifications:

- Material: ALU - RIGID PCB, 1.6 mm thickness
- Width: 25 mm width Cuttable 31 mm
- V in: 24V dc
- LED: 2835, 192 LED/m, 6 LED series

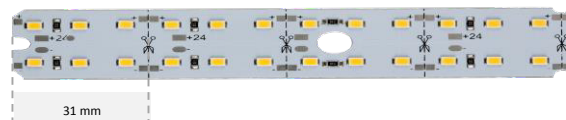

Applications

Suspended, Surface Commercial Linear Lighting for Office, Residence, etc.



Optional with 100 mm male / female self-locking connector