


Washex

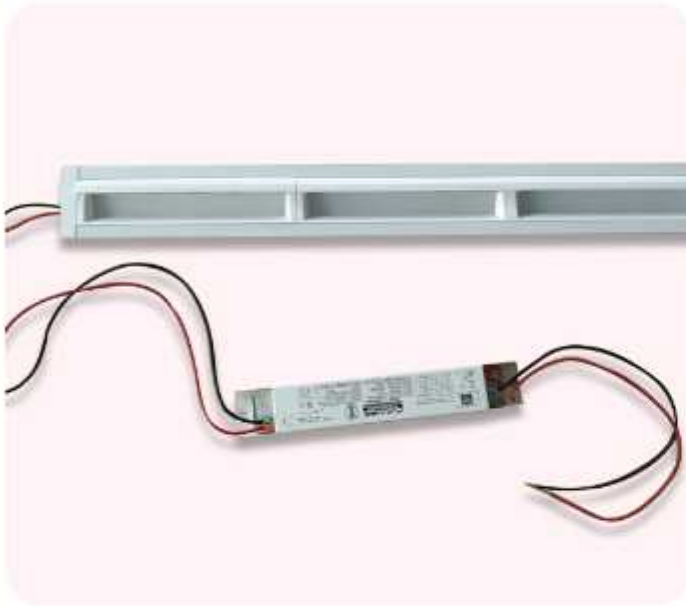

Specifications

Main Features

PARAMETERS	DESCRIPTION
LED PACKAGE	3535, 3 SDCM, LM80 PART
CRI	80-85 Ra, 90-95 Ra
CCT/COLOR	3000K/ 4000/ 5000K*
DIFFUSER	15°, 30° lens with reflector
END CAPS	Alu
Mounting clips	Spring clip
V in	45 v dc
DIMENSIONS	45.00 mm W X 35.00 mm H
CUTTABLE LENGTH	N/A
DRIVER	Non-integrated

▪ 48 LED Per Meter	▪ 27 watts
▪ Powered by BRIDGELUX	▪ Constant Current
▪ Finishing: Silver Anodized	▪ 45 V DC
▪ IP Rating: IP-44	▪ MOQ: 5 nos

* White: 3000 K, 3500 K, 4000 K, 5000 K, 5500 K

LM -80 APPROVED

30,000 WORK HOURS

1 BIN PROCESSING

Customization parameters:

❖ STANDARD SIZES :-	500 MM	1000 MM	2000 MM	CUSTOM SIZE
❖ STANDARD WATTAGE :-	4.8W / M	7.2W/M	9.6W/M	11.52W/M

PCB specifications:

- Material: ALU - RIGID PCB, 1.6 mm thickness
- Width: 26 mm width
- V in: 45V dc
- LED: 3535, 45 LED, 15 LED series X 3 parallel

Applications



Optional with 100 mm male / female self-locking connector